
THERMAL TOP HS PP TYRE FSC™ / RP2001 / WG62 / T4

PRODUCT DESCRIPTION / BENEFITS

FACE MATERIAL: Thermal top (protected) paper laminated with a clear polypropylene film. FSC Certified.

ADHESIVE: Rubber based permanent adhesive with high tack and adhesion on. Specifically designed for aftermarket tyre applications.

LINER: White supercalendered glassine paper one side siliconised. There may be slight variations in tone.

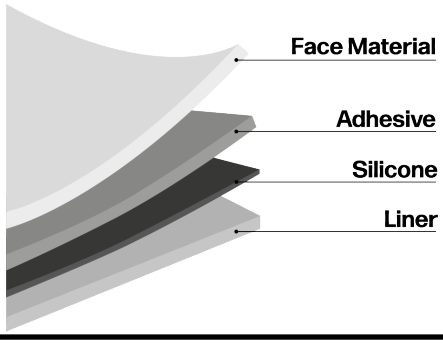

TYPICAL USE

- Automotive & Tyre

PRINTING & CONVERTING

Suitable for printing in direct thermal, water based and UV Flexography and UV letterpress. It is recommended to not pre-print the area that is going to be thermally printed. Testing for suitability between media, printers, inks and varnishes is always recommended prior to use.

PRODUCT RECOMMENDATIONS

Tear resistant label specifically designed for tyre tracking and identification.
Due to the adhesive nature, adhesive pattern gumming at the slit rolls is highly recommended to minimize the risk of bleeding.

SHELF LIFE

1 year, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH). Prolonged storage at higher temperatures and/or humidity levels will shorten the shelf life of the product.

THERMAL TOP HS PP TYRE FSC™ / RP2001 / WG62 / T4

PHYSICAL PROPERTIES / TYPICAL VALUES

FACE MATERIAL *THERMAL TOP HS PP TYRE FSC™*		
Grammage	111 Gr/m2	ISO 536
Thickness	120 µm	ISO 534-80

ADHESIVE *RP2001*		
Tack Glass	25 N	FTM9
Min Labelling temperature	+10 °C	
Usage Temperature	-20/+40 °C	
Peel Value Glass-24 hours	18 N/25mm	FTM2

LINER *WG62*		
Grammage	58 Gr/m2	ISO 536
Thickness	51 µm	ISO 534-80

QUALITY CERTIFICATIONS & APPROVALS

- **FSC License code: FSC-C106281**

DISCLAIMER

The information on physico-chemical characteristics and values in this document is based on tests we believe to be reliable, but it is provided without guarantee and does not constitute a warranty. It is intended solely for informational purposes. Purchasers should independently determine the suitability of this material for their specific use prior to application. All technical data are subject to change without notice. All Fedrigoni products are sold in accordance with the applicable terms and conditions of sale. For further information, please contact your Fedrigoni sales representative. In case of any ambiguities or discrepancies between the English version of this document and any translations, the English version shall prevail.